




Roofs 8 in 12 slope or more

Falls from elevation are one of the leading causes of injuries to construction workers in British Columbia.

Fall protection systems must be used

- When there is a possibility of a fall of 3 m (10 ft.) or more, OR
- Where a fall from a height of less than 3 m (10 ft.) involves a risk of injury greater than the risk of injury from the impact on a flat surface

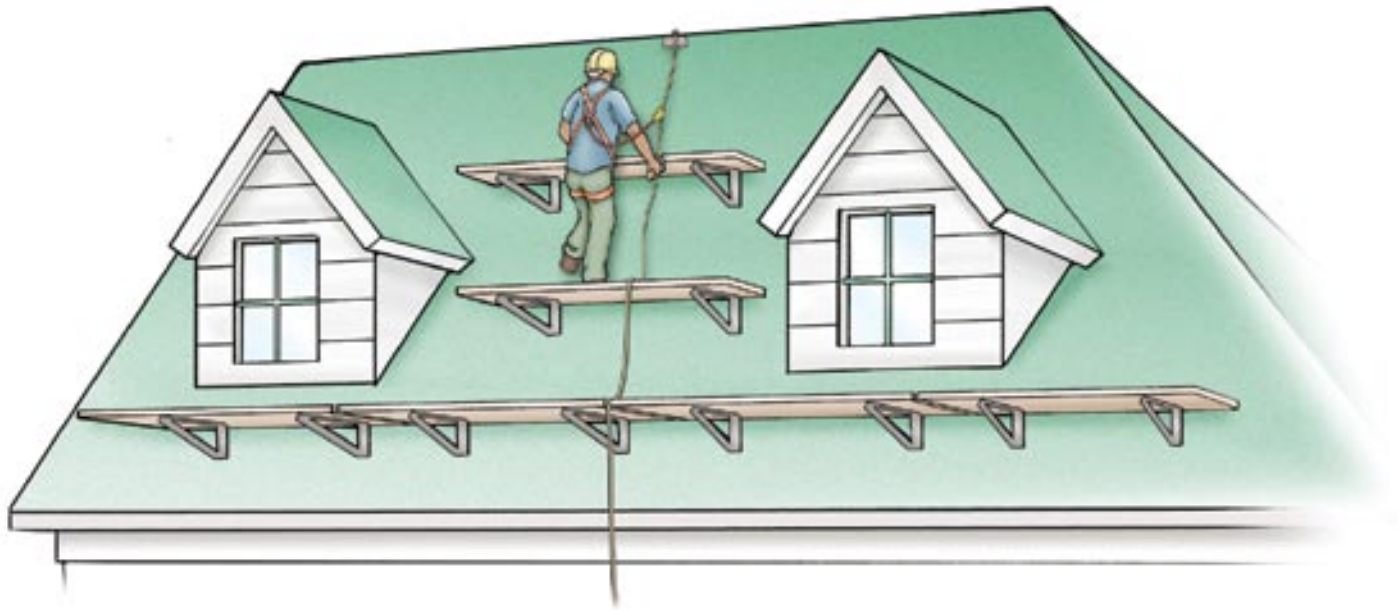

- Both toeholds and fall protection systems must be used when a roof has a slope of 8 to 12 (vertical to horizontal) or more.
- Toeholds must be at least 38 mm x 140 mm (2 in. x 6 in.).

NOTE: Exposed horizontal roof strapping may be used as toeholds as long as it provides safe footing.



Project: _____ Address: _____

Employer: _____ Supervisor: _____

Date: _____ Time: _____ Shift: _____

Number in crew: _____ Number attending: _____

Other safety issues or suggestions made by crew members:

Record of those attending:

Name: (please print)	Signature:	Company:
1.		
2.		
3.		
4.		
5.		
6.		
7.		
8.		
9.		
10.		
11.		
12.		
13.		
14.		
15.		

Manager's remarks: _____

Manager: _____ Supervisor: _____

(signature)

(signature)



WORKING TO MAKE A DIFFERENCE
worksafebc.com