



Inspecting your safety belt


Inspect your safety belt before each use. Check the buckle, the webbing, the D-rings, and the manufacturer's label for additional user information.

If the belt is damaged or worn, do not wear it.

NOTE: A safety belt that meets CSA Standard Z259.1 is acceptable to WorkSafeBC.


Buckle

- Make sure the buckle's tongue overlaps the buckle frame, moves freely, and is not bent or worn down.
- Check the roller to make sure it turns freely on the buckle frame.

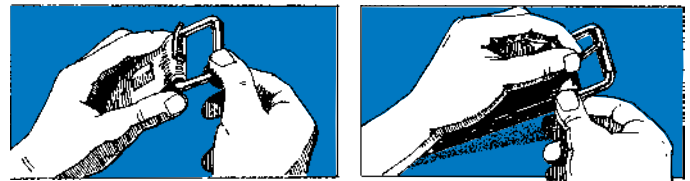


Webbing

- Look for frayed, cracked, cut, burned, or otherwise damaged webbing.

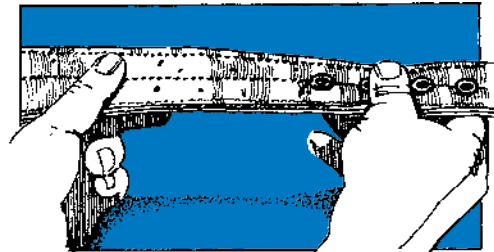

D-rings

- Check to see whether D-rings are bent, cracked, nicked, or gouged.
- Do not use safety belts that show signs of damage.

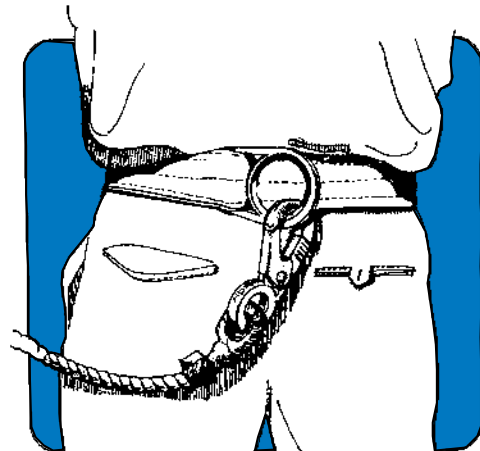

Manufacturer's label

Inspect the manufacturer's label on the belt. The manufacturer's label on a CSA-approved safety belt will contain the following information:

- Manufacturer or vendor identification
- The belt's waist size
- Material from which the belt is made
- Date the belt was manufactured
- Model number
- "Warning—not to be used for fall arresting"

Project: _____ Address: _____

Employer: _____ Supervisor: _____

Date: _____ Time: _____ Shift: _____

Number in crew: _____ Number attending: _____

Other safety issues or suggestions made by crew members:

Record of those attending:

Name: (please print)	Signature:	Company:
1.		
2.		
3.		
4.		
5.		
6.		
7.		
8.		
9.		
10.		
11.		
12.		
13.		
14.		
15.		

Manager's remarks: _____

Manager: _____ Supervisor: _____

(signature)

(signature)



WORKING TO MAKE A DIFFERENCE
worksafebc.com